

# SENTRY-PRO POWER SYSTEMS


By Gillette Generators, Inc.

MODEL  
**SPS-120**

**AIR COOLED LPG/NG, RESIDENTIAL STANDBY GEN-SET**

## SUBARU ENGINE-GENERATOR WITH KW POWER RATINGS RANGE

Model SERIES	STANDBY 130°C RISE		
	HZ	LPG	N.G.
<b>SPS-120</b>	60	12.0	11.0

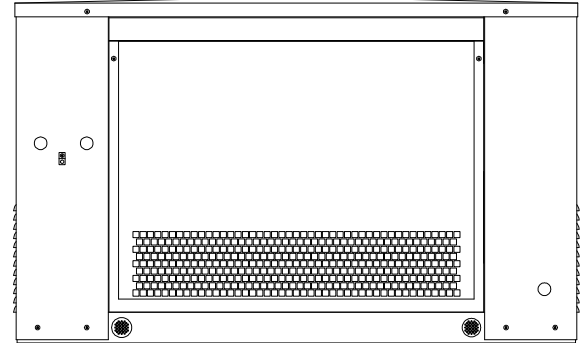

### STANDARD FEATURES

- All generator sets are USA wound, built, and thoroughly tested. Complete production models are USA factory built.
- Full power capacity to start up to a 5 ton A/C unit, equipped with “Easy Start” circuitry.
- All generator sets will accept 100% rated load in one step, per NFPA-110.
- All generators are UL-1446 certified. CSA approved.
- Capacitor load compensated (CLC) voltage regulation for  $\pm 3\%$  is standard on all gen-sets.
- Mechanical engine governor incorporates a special actuator, which allows precise  $\pm 2\%$  frequency regulation, from no load to full load. Built-in dual oil coolers yield longer engine service life.
- A brushless rotating field generator design with shunt wound excitation system and available at a broad range of voltages.
- Solid state, digital microprocessor logic and ultra-bright LED, annunciation display for different engine and generator functions, plus automatic fault shutdowns; high temp., over-crank, over-speed, under-speed, low oil, and low battery.
- The heavy duty, rugged dry fueled engine is capable of delivering rated power at 3600 RPM (60 HZ).
- All generator set control systems components and accessories provide a 2-year limited warranty at time of initial start-up. Optional extended warranties are available. Generators and engines are governed by separate warranties.
- “OPEN” Generator Sets: There is no enclosure, so gen-set must be placed within a weather protected area, un-inhabited by humans or animals, with proper ventilation.
- “LEVEL 1” All Aluminum Housing: Full weather protection and average sound attenuation for normal applications.
- “LEVEL 2” All Aluminum Housing: Full weather protection and superior sound attenuation for specific low noise applications. (See “Sound Level” chart on page 3)
- New, 3 year LTD. Warranty on all Subaru dry fuel engines.

### GENERATOR RATINGS

GENERATOR MODEL	VOLTAGE		PH	HZ	LIQUID PROPANE GAS FUEL		NATURAL GAS FUEL	
	L-N	L-L			130°C RISE STANDBY RATING		130°C RISE STANDBY RATING	
					KW/KVA	AMP	KW/KVA	AMP
SPS-120-1-1	120	240	1	60	12/12	50	11/11	46
SPS-120-3-2	120	208	3	60	12/15	42	11/13.8	38
SPS-120-3-3	120	240	3	60	12/15	36	11/13.8	33
SPS-120-3-4	277	480	3	60	12/15	18	11/13.8	17
SPS-120-3-5	127	220	3	60	12/15	40	11/13.8	36

RATINGS: All single phase gen-sets are rated at unity (1.0) power factor. All three phase gen-sets are rated at .8 power factor. 130° “STANDBY RATINGS” are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. 105° “PRIME RATINGS” are strictly for gen-sets that provide the prime source of electric power, where normal utility power is unavailable or unreliable. A 10% overload is allowed for a total of 1 hour, within every 12 hours of operation. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based on 130°C (standby), and 105°C (prime) R/R winding temperature, within a maximum 30°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.

# APPLICATION AND ENGINEERING DATA FOR MODEL SPS-120

## GENERATOR SPECIFICATIONS

Type ..... 2 Pole, 3600 RPM, revolving field design  
 Exciter ..... Brushless, shunt excited  
 Voltage Regulator ..... Capacitor load compensated (CLC)  
 Voltage Regulation .....  $\pm 3\%$ , No load to full load  
 Frequency ..... 60 HZ (50 HZ available)  
 Frequency Regulation ..... 2% (2 cycles, no load to full load)  
 Unbalanced Load Capability ..... 50% of nameplate rating  
 Motor Starting .... 4 HP, Code G w/ 35% Dip on specific voltages  
 Total Stator and Rotor Insulation ..... Class H, 180°C  
 Temperature Rise ..... 130°C R/R, standby rating @ 30°C amb.  
 ..... 105°C R/R, prime rating @ 30°C amb.  
 Bearing ..... 1, Pre-lubed and sealed  
 Power Leads ..... 4 Leads for dedicated single phase  
 ..... Optional 3 Leads for dedicated three phase  
 Coupling ..... Direct taper shaft  
 Total Harmonic Distortion ..... Max 6½% (MIL-STD705B)  
 Telephone Interference Factor ..... Max 250 (NEMA MG1-22)  
 Deviation Factor ..... Max 5% (MIL-STD 405B)  
 Alternator ..... Self ventilating and drip-proof  
 Ltd. Standby Warranty ..... 24 Months or 1000 hrs., first to occur  
 Ltd. Prime Warranty ..... 12 Months or 500 hrs., first to occur

## GENERATOR FEATURES

- Full alternator protection with solid state microprocessor, based controller, for automatic shutdown protection.
- Automatic voltage regulation by capacitor load compensation (CLC) design, yielding  $\pm 3\%$  from no load to full load.
- Alternator power ratings are based on temperature rise, measured by resistance method, as defined in MIL-STD 705C and IEEE STD 115, Method 6.4.4.
- Power ratings will not exceed temperature rise limitation for class H insulation as per NEMA MG1-22.40.
- Insulation resistance to ground, exceeds 1.5 meg-ohm.
- Stator receives 3000 V. hi-potential test on main windings, and rotor windings receive a 3000 V. hi-potential test, as per MIL-STD 705B.
- All windings are subjected to “surge” testing to confirm winding integrity and consistency with dielectric voltage withstand test per UL2200.39.
- Full copper windings with UL-1446 listing on all alternators.
- All gen-sets are prototyped and production tested.
- Full load testing on all engine-alternator sets, before shipping.
- Harmful harmonic distortions over 10% in generator power will harm digital loads. Gillette distortions are only 6%.

## ENGINE SPECIFICATIONS AND APPLICATIONS DATA

### ENGINE

Manufacturer ..... Subaru  
 Model and Type ..... EH722LZ2640, 4 cycle  
 Aspiration ..... Naturally  
 Cylinder Arrangement ..... V-Twin, 2 cylinders  
 Displacement Cu. In. (cm<sup>3</sup>) ..... 43.9 (720)  
 Bore x Stroke In. (mm.) ..... 3.31 x 2.56 (84 x 65)  
 Compression Ratio ..... 8.3:1  
 Main Bearings & Style ..... Over-sized Ball Bearing  
 Cylinder Head ..... Aluminum  
 Crankshaft ..... Forged High Carbon Steel  
 Exhaust Valve ..... Hardened for dry fuel use  
 Governor ..... Mechanical  
 Frequency Reg. (steady state) .....  $\pm 2\%$   
 Air Cleaner ..... (1) Replaceable main paper element  
 Oil Filter ..... (1), Replaceable spin-on  
 Special Ltd. Standby Subaru Engine Warranty ..... 36 Months

**Speed ..... 60 HZ**  
 Rated RPM ..... 3600  
 Max Power, bhp Standby / LPG ..... 25  
 Max Power, bhp Prime / LPG ..... 23  
 Max Power, bhp Standby / Nat. Gas ..... 22.5  
 Max Power, bhp Prime / Nat. Gas ..... 20.0

### FUEL SYSTEM (EPA-CARB Certified)

Type ..... LPG or NAT. GAS, vapor withdrawal  
 Fuel Pressure (kpa), in. H<sub>2</sub>O\* (1.74-2.74), 7”-115” Water column  
 Secondary Fuel Regulator ..... NG or LPG vapor system  
 Auto Fuel Lock-Off Solenoid ..... (2) Solenoids  
 Add redundant fuel shutoff for safety precautions.

### FUEL CONSUMPTION AT 3600 RPM, 60 HERTZ USE

		LP GAS: AT VARYING LOADS	FT <sup>3</sup> /HR (M <sup>3</sup> /HR)
STDBY		100% LOAD	88 (2.48)
		75% LOAD	71 (2.00)
		50% LOAD	53 (1.50)
PRIME		100% LOAD	79 (2.23)
		75% LOAD	64 (1.81)
		50% LOAD	48 (1.36)
<b>LPG = 2500 BTU X FT<sup>3</sup>/HR = Total BTU/HR</b>			

		NAT. GAS AT VARYING LOADS	FT <sup>3</sup> /HR (M <sup>3</sup> /HR)
STDBY		100% LOAD	195 (5.51)
		75% LOAD	170 (4.80)
		50% LOAD	120 (3.39)
PRIME		100% LOAD	176 (4.97)
		75% LOAD	153 (4.32)
		50% LOAD	108 (3.05)
<b>NG = 1000 BTU X FT<sup>3</sup>/HR = Total BTU/HR</b>			

LPG CONVERSION: 8.50 FT<sup>3</sup> = 1 LB. ; 36.4 FT<sup>3</sup> = 1 GAL

### OIL SYSTEM

Type ..... Full Pressure  
 Oil Pan Capacity qt. (L) ..... 1.24 (1.2)  
 Oil Pan Capacity W/ filter & (2) oil coolers qt. (L) ..... 1.80 (1.7)  
 All Weather, Year around, synthetic oil use ..... #OW-40

### ELECTRICAL SYSTEM

Ignition System ..... Electronic  
 Eng. Alternator:  
     Ground ..... Negative  
     Volts DC ..... 12  
     Max. Amp Battery Charging Output ..... 15  
 Min. Battery Req: ..... 12 VDC, 55 Amp/Hr, Size BCI# 21R or 26R (8½”lg X 7”wi X 8¾”hi), type “T”, “L”, or “X” terminals.  
 Minimum Cold-Cranking amps at 0°F (-17.8°C) ..... 390 CCA  
 Eng. Starter Motor ..... 12 VDC

## COOLING SYSTEM

Air cooled by generator and engine suction fans. A maximum 759 CFM cooling intake air is needed for proper engine cooling.

## EXHAUST SYSTEM

Residential type muffler with 58 CFM exhaust flow and an exhaust back pressure at 3600 RPM full load, of 30" water column.

## ENGINE CLASS AND EMISSION LIMITS

If an engine is not handheld (trimmer, blower, etc.) and is greater than or equal to 225cc displacement, it is a Class II engine. Following are maximum emission levels for CARB & EPA Class II engines.

### CALIFORNIA TIER II (GRAMS / HP-HOUR)

CLASS	DISPLACEMENT	HC+NO <sub>x</sub>	CO
II	25 HP = 720 CC	6.8	214

### USA EPA PHASE 2 (GRAMS / KILOWATT HOUR)

CLASS	DISPLACEMENT	HC+NO <sub>x</sub>	CO
II	25 HP = 720 CC	8.0	549

1 HORSEPOWER = .746 KW

1 KW = 1.341 HORSEPOWER

Subaru engines are EPA and CARB (California Air Resources Board) certified for LPG and Natural Gas.


## DERATING FACTORS

Engine horse power ratings meet SAE J1349 test codes. Reduce 3.5% for each 1000 feet, over 328 feet above seal level and 1% for every 10°F (5.65°C) rise, above 77°F (25°C). Generator specifications are in accordance with ASA, NEMA, and IEEE standards.

## ACOUSTIC DATA

A= Access Doors,  
B= Engine End cool air  
C= Generator End hot air  
& exhaust exit

Note: All tests are full load operation in standard weather with Open (no enclosure), Level 1 Enclosure, or Level 2 Enclosure.

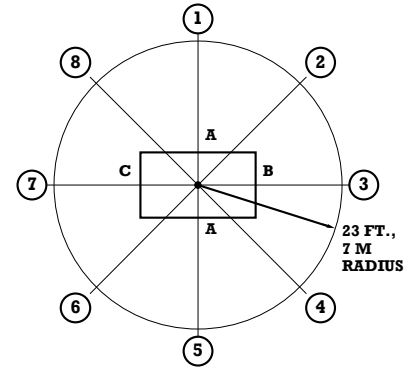

### Model SPS-120 O-Open (no enclosure)

Position	1	2	3	4	5	6	7	8
dB(A)	75	74	76	74	75	77	79	77

### Model SPS-120 E-Level 1 Enclosure

Position	1	2	3	4	5	6	7	8
dB(A)	69	69	71	68	69	72	73	72


### Model SPS-120 S-Level 2 Enclosure

Position	1	2	3	4	5	6	7	8
dB(A)	66	66	67	66	66	68	70	69

## STANDARD ENCLOSURE FEATURES


- All Aluminum Exterior Housing, ensuring a rust and tarnish free installation.
- Powder coat, backed-on enamel finish, passes UL 1000 hour salt spray test.
- 10 independent metal wash stages, with a final iron phosphate metal etching before powder coat finish.
- Interior "Sound Dampening" preventing metal "ringing".
- Interior sound absorbing foam through out enclosure.
- Two, locking doors for access to controllers.
- Hot muffler is concealed away from "touch".
- Access to engine service through bolted access panels.

## ENGINE MONITOR & OPERATION MODE FOR RESIDENTIAL STANDBY GENERATOR SETS

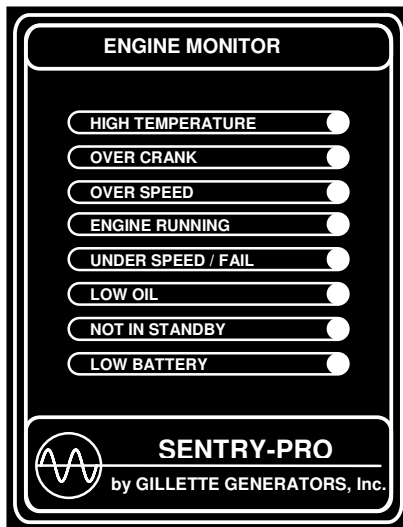

These sets use standard (2) wire start interfacing fully compatible with any dry contact start-stop system that might be installed on ATS, remote start-stop control panels, Trace inverters for controlling solar power battery arrays, etc. The start-stop signal on such equipment is utilized by the gen-set to initialize a (4) second countdown before the gen-set actually begins its first crank cycle, to

avoid start-ups due to momentary power outages.

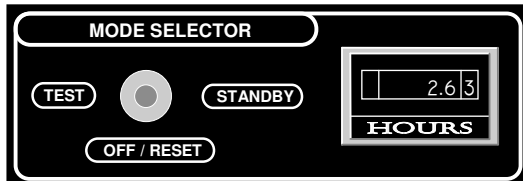

These standby gen-sets are "stand-alone" units which can work with any type ATS system or any other type sensing device, using (2) wire start-stop interfacing.

### Standard features of SPS series standby sets are:

Solid State Digital Microprocessor providing automatic engine start-stop; auto shutdown for low oil, high temperature, over speed, under speed, engine fail, engine crank failure (after 3 failed crank attempts); battery charge fail; a "not in standby mode" warning indicator and a built-in (4) second engine start delay and (2) minute engine cool down delay. Timer cycles can be disabled in the field if application requirements so dictate. The "Mode Selector" switch serves (3) functions: A "Test" position (causing the gen-set to start and run indefinitely, without ATS switching the load); a "Standby" position (the system is ready to start automatically, whenever utility power fails); and an "Off/Reset" position (the engine can not start under any condition, so this is the service position and reset position when any fault is corrected). The "Engine Monitor" has (8) highly visible LED annunciators for all conditions. When mode switch is placed in "Standby" all (8) LED's will flash (3) times serving as a lamp test. The panel also includes a mainline circuit breaker and run time meter.

# STANDARD AND OPTIONAL FEATURES FOR MODEL SPS-120

## CONTROL PANEL:

SPS Series, automatic start-stop engine controller, utilizing solid state digital microprocessor with (8) ultra-bright LED annunciators. Panel also has main line circuit breaker, run time meter, and mode selector switch with "Test", "Standby", or "Off/Reset" positions.

## ENGINE:

Full flow air cleaner and oil filter • full pressure oil system with (2) separate oil coolers • spin-on oil filter • residential muffler • 12 VDC battery charging alternator • vibration isolators • secondary dry fuel regulator with redundant dry fuel lock-off solenoid • overhead valve Subaru engine with EPA/CARB certified dry fuel system • 3 year engine warranty

## GENERATOR:

AC generator with capacitor regulation system • single bearing • brushless design • class H, 180°C insulation system • self ventilated, drip proof construction

## ELECTRICAL:

Battery tray • battery cables • battery straps • 2-stage, float type 3 amp auto battery charger

## SUPPORT:

Operation, maintenance, and installation instructions  
 Call 1-800-777-9639 or Fax 1-574-262-1840  
 E-mail : sales@gillettegenerators.com  
 Web : www.gillettegenerators.com


## OPTIONAL FEATURES & ACCESSORIES

- Remote annunciator
- 3 Phase winding
- 3 Phase ATS system
- 1 Phase ATS system

- Open (no enclosure) for special applications
- Super-Silent housing w/ special sound deadening foam
- All stainless steel weather housing
- Crankcase oil heater for faster cold weather starts

## DIMENSIONAL OVERVIEW PRINT FOR MODEL SPS-120

TOP VIEW

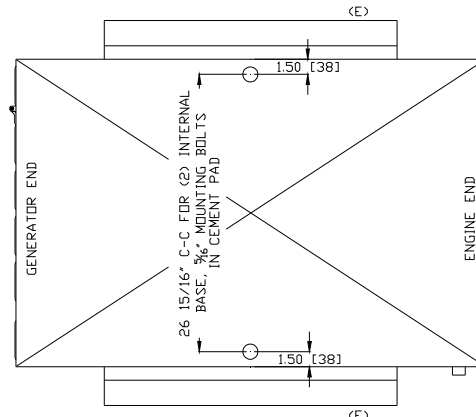

NOTE: DESIGN & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. DIMENSIONS SHOWN ARE FOR REFERENCE ONLY AND SHOULD NOT BE USED FOR PLANNING INSTALLATION. CONTACT GILLETTE FOR CERTIFIED DRAWINGS.

DRAWING NOT TO SCALE & DIMENSIONS = IN [MM]


**(A) (4) LIFTING HOLES IN BASE:**  
 1-1/2" DIA. HOLES ARE INSTALLED IN BASE, FOR LIFTING EQUIPMENT. REMOVE PLASTIC COVERS IN THESE HOLES, AND RE-INSTALL COVERS WHEN GEN-SET IS IN PLACE.

**(B) DRY FUEL CONNECTION:**  
 LPG OR NAT. GAS CONNECTION IS LOCATED ON THE ENGINE END PANEL AS SHOWN. THERE IS A 3/4" THREADED MALE PIPE FOR CONNECTION.

**(C) ELECTRICAL & GROUND CONNECTION:**  
 THERE ARE TWO KNOCK-OUT HOLES ON THE LEFT HAND SIDE OF GENERATOR END. BOTH HOLES ARE FOR 3/4" CONDUIT.

**(D) CONTROL DOOR PANEL:**  
 THIS PANEL IS HERE TO HELP WITH INITIAL WIRING INSTALLATION AND QUICK ACCESS TO GENERATOR CONTROLS. QUALIFIED PERSONNEL ONLY: UN-LOCK AND OPEN, CONTROL DOOR. REMOVE ROOF SCREW AND SLIDE BLANK PANEL DOWN AND OFF, FOR FULL WIRING ACCESS

**(E) EXHAUST CHUTE:**  
 LOCATED IN THIS CHUTE, IS THE EXHAUST PIPE OF MUFFLER PLEASE KEEP CLEAR WHILE UNIT IS RUNNING OR HOT. DO NOT INSTALL UNIT WHERE THE EXHAUST MAY COME INTO CONTACT WITH FLAMMABLE OBJECTS.

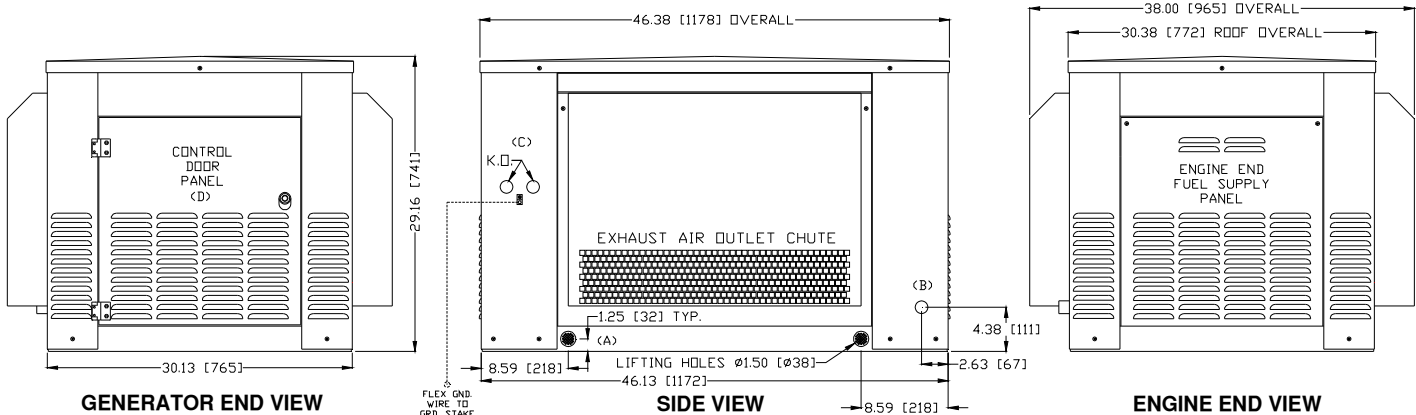

## DIMENSIONS AND WEIGHTS

FOR ALUMINUM OR STAINLESS STEEL HOUSINGS	Open Set	Level 1 Enclosure	Level 2 Enclosure
Length in .....	46	46	46
Width in .....	30	38	38
Height in .....	24.5	28.5	28.5
Net Weight lbs.....	385	490	515
Ship Weight lbs.....	435	540	565
<b>INCREASE IN WEIGHT FOR STAINLESS STEEL HOUSING</b> .....	N/A	+70	+95

## DISTRIBUTED BY: